



Confetti

*It's Your Light!*

# Confetti

Confetti adds a festive twist to the traditional RLM, with an amazing versatility that allows for the creation of colorful, custom-tailored designs. Confetti is offered in cord- or stem-hung pendant and wall mount configurations, with choice of incandescent, line-voltage



halogen, compact fluorescent or metal halide lamping. Its reflectors are constructed of heavy wall spun aluminum alloy with optional clear prismatic conical drop lens or wire guard. Available in a full palette of bright colors,



with custom matching upon request, Confetti turns any residential, commercial, indoor or outdoor application into a celebration of light.

# CP SERIES Prismatic Refractor



CP 16 CORD  
YELLOW



CP 12 DA1  
GREEN  
(Shown with optional CDL 12)

Catalog #	H	W	Lamp Wattage				Accessories
			<i>i</i>	<i>f</i>	<i>e</i>	<i>m</i>	
CP 12	13-1/2	12-1/2	150	13	26, 32, 42 or 57	50	CDL12* or DWG12
CP 16	18-3/4	16-3/8	300	13	26, 32, 42 or 57	70, 100 or 175	CDL16* or DWG16
CP 22	24	22-3/8	300	13	26, 32, 42 or 57	175, 250 or 400	CDL22* or DWG16

*i* - Accepts incandescent A lamp (medium base) 120V

*f13* - Includes 13 Watt compact fluorescent double twin tube lamp (GX23-2 base) 120V/NPF magnetic ballast.

*e26, e32, e42, e57* - Includes 26, 32, 42 or 57 Watt compact fluorescent triple twin tube lamp (G24qx 4-pin base) 120V thru 277V HPF electronic ballast.


**Not available on CORD hung models.**

*m50, m70, m100, m175, m250, m400* - Includes (medium base) 50, 70, 100 or 175 Watt metal halide lamp. 250 & 400 Watt models include mogul base lamp.

Dual voltage 120 or 277 High Power Factor magnetic ballast - **Remote mounting required** - 20 ft. maximum lamp to ballast.

**\*CDL required on metal halide (m) models.**

Note: CP Series compact fluorescent models also available with **multiple lamp** configurations. Please consult factory.



## Optional Accessories



**Conical Drop Lens (CDL)**  
Add suffix **CDL 11, 12, 14, 16 or 20** to catalog number when ordering.



**Drop Wire Guard (DWG)**  
Add suffix **DWG 11, 12, 14, 16 or 20** to catalog number when ordering.

# CD SERIES Deep Dome Reflector



CD 11 CORD BLUE








CD 14 STEM GREY



CD 14 DA4 GREEN  
(Shown with optional DWG14)




**Confetti Arms\***  
\*May also be ordered with Reflecta series Goose Neck arms

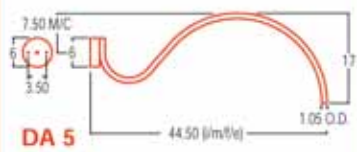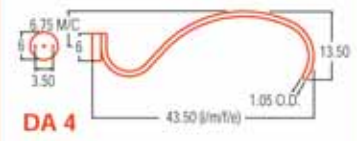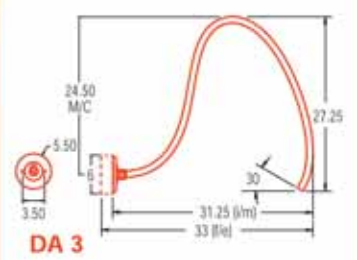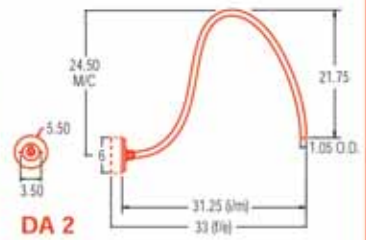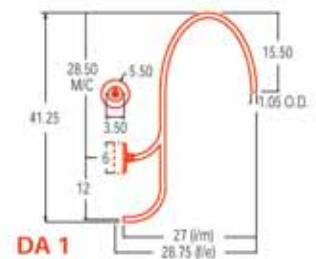

Catalog #	H	W	Lamp Wattage				Accessories
			i	f	e	m	
CD 11	10-3/4	11-1/2	150	13	26, 32 or 42	50	CDL11* or DWG11
CD 14	13-1/4	14	200	13	26, 32, 42 or 57	70 or 100	CDL14* or DWG14

*i* - Accepts incandescent A lamp (medium base) 120V  
*f13* - Includes 13 Watt compact fluorescent double twin tube lamp (GX23-3 base) 120V/NPF magnetic ballast.  
*e26, e32, e42 e57* - Includes 26, 32, 42 or 57 Watt compact fluorescent triple twin tube lamp (G24qx 4-pin base). 120V thru 277V HPF electronic ballast.  
**Not available on CORD hung models.**  
*m50, m70, m100* - Includes 50, 70 or 100 Watt metal halide lamp (medium base). Dual voltage 120 or 277 HPF magnetic ballast - **Remote mounting required** - 20 ft. maximum lamp to ballast.

\*CDL **required** on metal halide (*m*) models.



## Pendant Mountings


### Liquid-tight Strain Relief (LSR)

Add suffix **LSR** to cord-hung models when ordering.




### Cord-hung Pendant (CORD)

72" Black Cord and canopy (Custom cord lengths available)  
 Add suffix **CORD** to models number when ordering.



### Stem-hung Pendant (STEM)

12" Stem (11/16" O.D.) and hang-straight canopy (Custom stem lengths available)  
 Add suffix **STEM** to model number when ordering.



# Confetti

Confetti adds a festive twist to the traditional RLM, with an amazing versatility that allows for the creation of colorful, custom-tailored designs. Confetti is offered in cord- or stem-hung pendant and wall mount configurations, with choice of incandescent, line-voltage



halogen, compact fluorescent or metal halide lamping. Its reflectors are constructed of heavy wall spun aluminum alloy with optional clear prismatic conical drop lens or wire guard. Available in a full palette of bright colors,



Red Blue Green



Yellow Orange White



Beige Black Grey



Silver Gold Copper

with custom matching upon request, Confetti turns any residential, commercial, indoor or outdoor application into a celebration of light.

# CS SERIES Standard Dome Reflector



CS16 DA2  
BLUE




CS16 DA3  
RED



CS20 STEM  
BEIGE

Catalog #	H	W	Lamp Wattage			m	Accessories
			i	f	e		
CS 12	8-1/2	12-1/4	100	13	26, 32 or 42	50	CDL12* or DWG12
CS 16	10-3/8	16-1/4	150	13	26, 32 or 42	70	CDL16* or DWG16
CS 20	14	20-1/4	300	13	26, 32, 42 or 57	100	CDL20* or DWG20



*i* - Accepts incandescent A lamp (medium base) 120V  
**f13** - Includes 13 Watt compact fluorescent double twin tube lamp (GX23-3 base). 120V/NPF magnetic ballast.  
**e26, e32, e42, e57** - Includes 26, 32, 42 or 57 Watt compact fluorescent triple twin tube lamp (G24qx 4-pin base). 120V thru 277V HPF electronic ballast. **Not available on CORD hung models.**  
**m50, m70, m100** - Includes 50, 70 or 100 Watt metal halide lamp (medium base). Dual voltage 120 or 277 HPF magnetic ballast - **Remote mounting required** - 20 ft. maximum lamp to ballast.  
 \*CDL **required** on metal halide (**m**) models.

## Optional Accessories



**Conical Drop Lens ( CDL )**  
 Add suffix **CDL 11, 12, 14, 16 or 20**  
 to catalog number when ordering.



**Drop Wire Guard ( DWG )**  
 Add suffix **DWG 11, 12, 14, 16 or 20**  
 to catalog number when ordering.

# CT SERIES Tapered Reflector

**CT 12 STEM GOLD**  
(Shown with optional CDL12)




**CT 20 CORD COPPER**  
(Shown with optional CDL20)



Catalog #	H	W	Lamp Wattage			m	Accessories
			i	f	e		
CT 12	7	12-1/2	100	13	26, 32 or 42	50	CDL12* or DWG12
CT 20	11-1/2	20-1/4	300	13	26, 32, 42 or 57	100	CDL20* or DWG20

*i* - Accepts incandescent A lamp (medium base) 120V  
**f13** - Includes 13 Watt compact fluorescent double twin tube lamp (GX23-3 base) 120V/NPF magnetic ballast.  
**e26, e32, e42, e57** - Includes 26, 32, 42 or 57 Watt compact fluorescent triple twin tube lamp (G24qx 4-pin base). 120V thru 277V HPF electronic ballast.  
 Not available on CORD hung models.  
**m50, m100** - Includes 50 or 100 Watt metal halide lamp (medium base). Dual voltage 120 or 277 HPF magnetic ballast - Remote mounting required - 20 ft. maximum lamp to ballast.

\*CDL required on metal halide (m) models.



## Pendant Mountings


### Liquid-tight Strain Relief (LSR)

Add suffix **LSR** to cord-hung models when ordering.



### Cord-hung Pendant (CORD)

72" Black Cord and canopy (Custom cord lengths available)  
 Add suffix **CORD** to models number when ordering.








### Stem-hung Pendant (STEM)

12" Stem (11/16" O.D.) and hang-straight canopy (Custom stem lengths available)  
 Add suffix **STEM** to model number when ordering.



**Confetti Arms\***  
 \*May also be ordered with Reflecta series Goose Neck arms

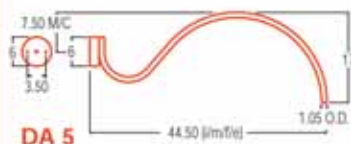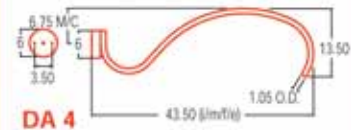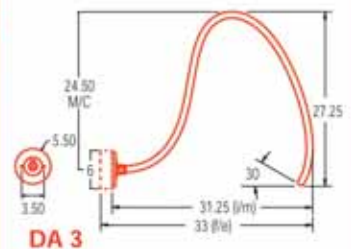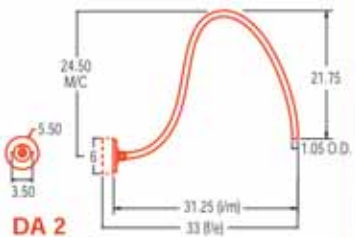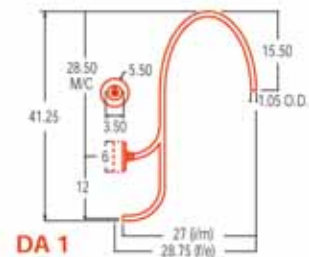

# Confetti

Confetti adds a festive twist to the traditional RLM, with an amazing versatility that allows for the creation of colorful, custom-tailored designs. Confetti is offered in cord- or stem-hung pendant and wall mount configurations, with choice of incandescent, line-voltage



halogen, compact fluorescent or metal halide lamping. Its reflectors are constructed of heavy wall spun aluminum alloy with optional clear prismatic conical drop lens or wire guard. Available in a full palette of bright colors,



Red Blue Green



Yellow Orange White



Beige Black Grey



Silver Gold Copper

with custom matching upon request, Confetti turns any residential, commercial, indoor or outdoor application into a celebration of light.

## Confetti Specifications

**APPLICATIONS:** Commercial and residential interiors and exteriors.

**CONSTRUCTION:** Heavy wall aluminum and cast alloys, with spun aluminum reflectors, extruded stems and mounting arms. Cast canopies furnished on wall-mount models. Cord hung models supplied pre-wired with 72-inch, black, three-conductor 18-3 SJT and color-coordinated ceiling canopy; stem-hung models supplied with 12-inch, 3/8-IP color-coordinated stem and heavy-duty, hang-straight (45 degree) steel swivel canopy.

**DIFFUSER:** Standard models supplied "bare lamp." Prismatic refractor (**CP**) and Conical Drop Lens (**CDL**) molded of premium Lighting Grade (LG) acrylic, offering excellent long-term resistance to UV yellowing.

**ACCESSORIES:** Conical Drop Lens (**CDL**) - UL-recognized lamp containment barrier with color-coordinated retaining ring.

Drop Wire Guard (**DWG**) - Fabricated from heavy-gauge steel and brushed-nickel plated, providing aesthetic value as well as protection to the lamp chamber.

Liquid-tight Strain Relief (**LSR**) - Optional on cord-hung fixtures.

**LAMPING:** Choice of Incandescent (*i*), with optional Halogen (120-volt, medium-base) lamp, Compact Fluorescent (*f/e*) or Metal Halide (*m*). Consult individual model data charts for per-fixture wattage. High-lumen, multi-lamp compact fluorescent packages available on select models - please contact the factory.

**BALLAST:** Fluorescent (*f*): Normal Power Factor magnetic 120-volt 60 Hz., housed in fixture canopy.

Electronic (*e*): High Power Factor (>.97), universal voltage (120-277), with smart circuitry that senses lamp wattage and supply voltage (50/60 Hz), and protects lamp and ballast at the end of the lamp life. Specification-grade features include true 0-degree start (-18 degrees c.), >.98 Ballast factor, <3% flicker and <10% Total Harmonic Distortion (THD). Ballast is housed in fixture canopy. For dimmable electronic models, please consult the factory.

Metal Halide (*m*): High Power Factor, dual voltage (120 or 277) 60 Hz, high reactance autotransformer, indoor/outdoor type 1, F-can style. Starting temperature rated at -20 degrees F. Remote mounting required - maximum 20 feet lamp to ballast. Weather-tight enclosure (by others) required for installation in wet locations.

**SOCKET:** Incandescent - Medium-base porcelain with nickel-plated screw shell and center contact.

Compact Fluorescent - Heat-resistant thermoplastic with lamp retention clips, providing for secure lamp fit and easy push-pull re-lamping.

Metal Halide - 4KV pulse-rated medium-base porcelain with brass-nickel plated screw shell and center contact reinforced with corrosion-resistant leaf spring.

**MOUNTING:** Pendant (cord or stem) and Wall-mount fixtures are designed for attachment to a recessed four-inch outlet box.

**FASTENERS:** Stainless steel, brass and aluminum.

**FINISHES:** A full palette of bright colors and metallic\* finishes is offered. Metal parts are chemically cleaned and pre-treated with chromate or iron phosphate primer prior to application of thermosetting polyester (TGIC) powder coating. Copper and Silver finishes are comprised of real metal flakes combined with industrial grade exterior (liquid) enamel. Liquid-finish custom color matching available with submittal of sample chip.

\*Optional Clear Topcoat (**TC**) is recommended to maintain appearance of metallic finishes in exterior applications. Add suffix **TC** to color selection when ordering.

**COMPLIANCES:** U.L. listed.

Specifications contained within this brochure are subject to change without notice.

### Optional Accessories



**Conical Drop Lens (CDL)**

Add suffix **CDL 11, 12, 14, 16 or 20** to catalog number when ordering.





**Drop Wire Guard (DWG)**

Add suffix **DWG 11, 12, 14, 16 or 20** to catalog number when ordering.

# CONFETTI ORDERING GUIDE

## Example:

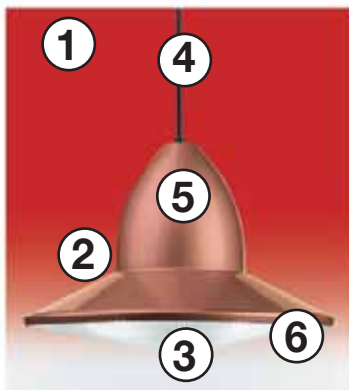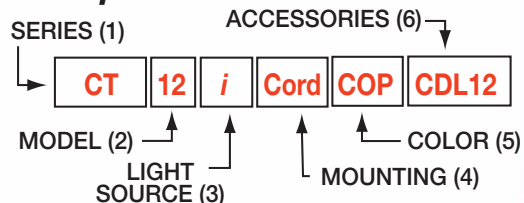

### (1) SERIES

- CD - Deep Dome Reflector
- CP - Prismatic Refractor
- CS - Standard Dome Reflector
- CT - Tapered Reflector

### (2) MODEL

- 11 or 14
- 12, 16 or 22
- 12, 16 or 20
- 12 or 20

### (3) LIGHT SOURCE

**i** - Accepts incandescent A lamp (medium base). Consult individual fixture data charts for specific wattages.

**f13** - Includes 13 Watt compact fluorescent double twin tube lamp (GX23-2 base). Supplied with 120-volt Normal Power Factor magnetic ballast.

**e26, e32, e42, e57** - Includes 26, 32, 42 or 57 Watt compact fluorescent lamp (G24qx 4-pin base). Supplied with universal voltage (120-277) High Power Factor electronic ballast.

**Not available on cord-hung pendant models.**

For dimmable electronic models - please consult the factory.

**m50, m70, m100** - Includes 50, 70 or 100 Watt metal halide lamp (medium base). 175 Watt (m175) available on CP 16 & CP 22 only. 250 or 400 Watt (m250 or m400) available on CP 22 only. Supplied with dual voltage (120 or 277) High Power Factor ballast - **Remote mounting required** - 20 ft maximum lamp to ballast.

**Not available on "bare lamp" models.**

### (4) MOUNTING

**Cord** - Cord-hung pendant, 72-inch black cord and canopy. (Custom cord lengths are available.)

**Stem** - Stem-hung pendant, 12-inch stem (11/16" O.D.) and heavy duty hang-straight canopy. (Custom stem lengths are available.)

**Arm** - Order Designer Arm **DA1 - DA5** or order Standard Gooseneck Arm **GN1 - GN13**.

### (5) COLOR SELECTION

#### Smooth Finishes

- Beige (**BE**)
- Black (**BL**)
- Blue (**BLU**)
- Green (**GN**)
- Gray (**GY**)
- Orange (**OR**)
- Red (**RED**)
- Yellow (**YEL**)
- White (**WH**)

#### Metallic Finishes\*

- Copper (**COP**)
- Gold (**GOL**)
- Silver (**SIL**)

\*Optional clear topcoat (**TC**) is recommended to maintain appearance of metallic finishes in exterior applications. Add suffix **TC** to color selection when ordering.

### (6) ACCESSORIES

Conical Drop Lens - **CDL 11, CDL 12, CDL 14, CDL 16, CDL 20** or **CDL 22**

Drop Wire Guard - **DWG 11, DWG 12, DWG 14, DWG 16, DWG 20**

Liquid-tight Strain Relief - **LSR**

### LAMPS

A/HAL (medium base) 120V halogen lamp available (to be ordered separately) for use with (*i*) models. Specify lamp **A/HAL60, A/HAL75** or **A/HAL100** when ordering.

Includes lamp **DTT13**.

Includes lamp **TTT26 (e26), TTT32 (e32), TTT42 (e42)** or **TTT57 (e57)**.

Note: **CP** Series models also available with **multiple lamp** configurations. Please consult factory.


Includes lamp **M50, M70, M100, M175, M250** or **M400**.

Note: **M175** available on **CP 16** or **CP 22** only. **M250** and **M400** available on **CP 22** only.




## Confetti Arms\*


\*May also be ordered with Reflecta series Goose Neck arms

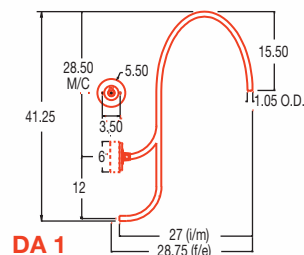


DA 1

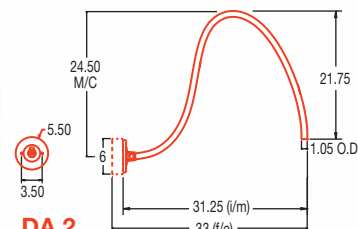


DA 2

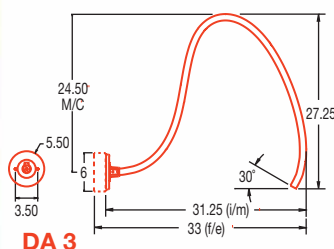

DA 3

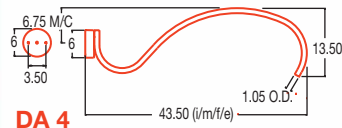

DA 4

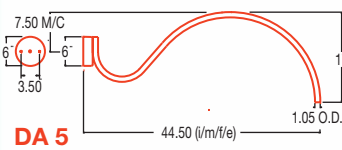

DA 5

## Pendant Mountings

### Liquid-tight Strain Relief (LSR)


Add suffix **LSR** to cord-hung models when ordering.



### Cord-hung Pendant (CORD)

72" Black Cord and canopy (Custom cord lengths available)


Add suffix **CORD** to models number when ordering.



### Stem-hung Pendant (STEM)

12" Stem (11/16" O.D.) and hang-straight canopy (Custom stem lengths available)

Add suffix **STEM** to model number when ordering.





"Confetti was created from a desire to update the appearance of what is essentially a timeless fixture in the lighting industry, the RLM reflector. By enhancing the Confetti RLM with the bullet-shaped hub, the design is at once modernized and made suitable for a wide range of applications. Confetti is a fixture that would be equally at home in a family's breakfast nook as it would be in the latest hotel or restaurant."

The Luraline Design Team

  
Confetti

  
LURALINE

*Manufacturers of Quality Lighting Products Since 1967*

2388 NW 150 Street • Opa Locka, FL 33054 • 800.940.6588 • Fax: 305.685.6500

[www.luraline.com](http://www.luraline.com)