

AWPA25

Curved Large Wall Pack

Housing: Die-cast aluminum housing and hinged front frame with stainless steel hinge pins, 1/2" coin plugs with O-rings for conduit and photocell, textured architectural bronze powdercoat finish over a chromate conversion coating, includes safety cable to prevent front frame impact when relamping

Reflector: Aluminum reflector

Lens: Prismatic borosilicate glass lens

Socket: HID: Porcelain 5KV pulse rated mogul base socket with nickel-plated screw shell


Mounting: Cast-in template for mounting directly over a 4" recessed outlet box, or use 1/2" surface conduit, includes Easy-Hang "Two Hands Free" Wall-Mounting Plate with leveling device on back

Wattage: High Pressure Sodium: 100 to 400w
Pulse-start / Metal Halide: 100 to 400w
Induction: 80w

Listings & Ratings: CSA Listed for wet locations




Catalog #	Wattage	Voltage	Lamp	Ballast
AWPA25H100QMG	100	Quad	HPS	HX-HPF
AWPA25H150QMG	150	Quad	HPS	HX-HPF
AWPA25H250Q	250	Quad	HPS	CWA
AWPA25H400Q	400	Quad	HPS	CWA
AWPA25M100QMG	100	Quad	MH	HX-HPF
AWPA25M150QMG	150	Quad	MH	HX-HPF
AWPA25P250Q	250	Quad	PS	CWA
AWPA25P320Q	320	Quad	PS (E)	CWA
AWPA25P400Q	400	Quad	PS (E)	CWA
AWPA25I80120	80	120	IND (E)	Electronic
AWPA25I80277	80	277	IND	Electronic

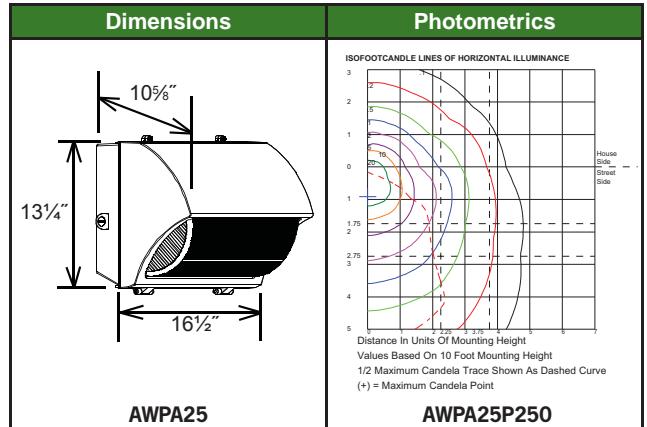


Items marked with (E) meet EISA regulations for 150-500 watt Metal Halide luminaires.

Options and Accessories

Catalog #	Description
PC1	120V Photocell (Field Installed)
PC2	208-277V Photocell (Field Installed)
WPA25WG	Wire guard for WPA25



PC1 / PC2



WPA25WG

Specifications subject to change without notice.