

**AWPC15**

*Full-Cutoff Wall Pack*

**Housing:** Die-cast aluminum housing and hinged full cutoff front frame, 1/2" coin plugs with O-rings for conduit and photocell, textured architectural bronze powdercoat finish over a chromate conversion coating

**Reflector:** Aluminum reflector

**Lens:** Flat tempered clear glass lens

**Socket:** HID: Porcelain 4KV pulse rated medium base socket with nickel-plated screw shell  
CF: Plug-in type, GX24Q-3/-4


**Mounting:** Cast-in template for mounting directly over a 4" recessed outlet box, or use 1/2" surface conduit

**Wattage:** High Pressure Sodium: 35 to 150w.  
Metal Halide: 70 to 150w  
Compact Fluorescent: 1 x 26 to 42w, 2 x 26 to 42w  
LED: 1 x 7.5w, 2 x 7.5w, 1 x 15w, 2 x 15w


**Listings & Ratings:** CSA Listed for wet locations



Catalog #	Wattage	Voltage	Lamp	Ballast
AWPC15H35R120	35	120	HPS	R-NPF
AWPC15H50R120	50	120	HPS	R-NPF
AWPC15H70R120	70	120	HPS	R-NPF
AWPC15H100R120	100	120	HPS	R-NPF
AWPC15H150R120	150	120	HPS	R-NPF
AWPC15H50D	50	120/277	HPS	HX-HPF
AWPC15H70Q	70	Quad	HPS	HX-HPF
AWPC15H100Q	100	Quad	HPS	HX-HPF
AWPC15H150Q	150	Quad	HPS	HX-HPF
AWPC15M70Q	70	Quad	MH	HX-HPF
AWPC15M100Q	100	Quad	MH	HX-HPF
AWPC15M150Q	150	Quad	MH	HX-HPF
AWPC15F26E	1 x 26	120-277	CF	Electronic
AWPC15F32E	1 x 32	120-277	CF	Electronic
AWPC15F42E	1 x 42	120-277	CF	Electronic
AWPC15F52E	2 x 26	120-277	CF	Electronic
AWPC15F64E	2 x 32	120-277	CF	Electronic
AWPC15F84E	2 x 42	120-277	CF	Electronic
AWPC15L1X7HQ	1 x 7.5	120-277	LED	Electronic
AWPC15L2X7HQ	2 x 7.5	120-277	LED	Electronic
AWPC15L1X15Q	1 x 15	120-277	LED	Electronic
AWPC15L2X15Q	2 x 15	120-277	LED	Electronic

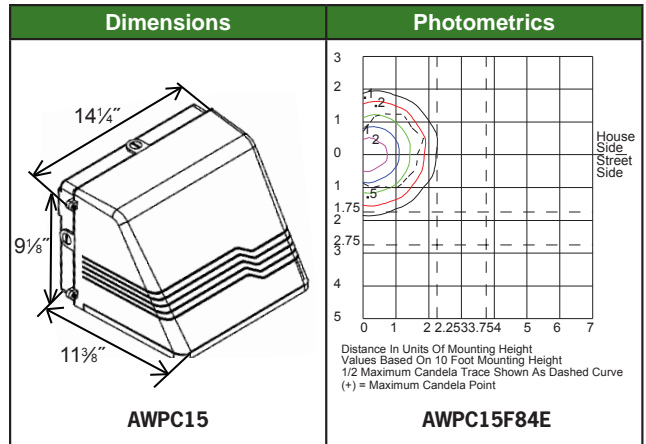

Options and Accessories	
Catalog #	Description
BBE	Battery Back Up - available for Compact Fluorescent models (specify 120V or 277V)
PC1	120V Photocell (Field Installed)
PC2	208-277V Photocell (Field Installed)
WPC15LG	Clear polycarbonate vandal resistant guard
WPC15WG	Wire guard, stainless steel construction
WPC15Y	Adjustable yoke, allows 40° vertical swivel (includes hardware)

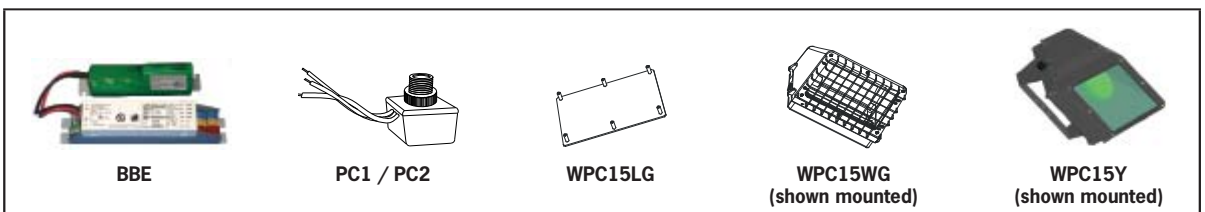

Specifications subject to change without notice.