

**AWPR22HC**


*14-1/2" Round Half Cutoff Bulkhead*

**Housing:** Gasketed die cast aluminum housing and half-cutoff front frame, textured powdercoat finish over a chromate conversion coating  
**Reflector:** White powdercoat steel pan reflector  
**Lens:** Opalescent polycarbonate lens  
**Socket:** CF Plug-In Type, GX24Q-3/-4  
**Mounting:** Surface mount, or conduit entry via two 1/2" knockouts  
**Wattage:** Compact Fluorescent: 2 x 26 to 42w  
**Listings & Ratings:** CSA Listed for wet locations



Catalog #	Wattage	Voltage	Lamp	Ballast
AWPR22HCF52E**	2 x 26	120-277	CF	Electronic
AWPR22HCF64E**	2 x 32	120-277	CF	Electronic
AWPR22HCF84E**	2 x 42	120-277	CF	Electronic

\*\*Specify color: W-White, Z=Bronze

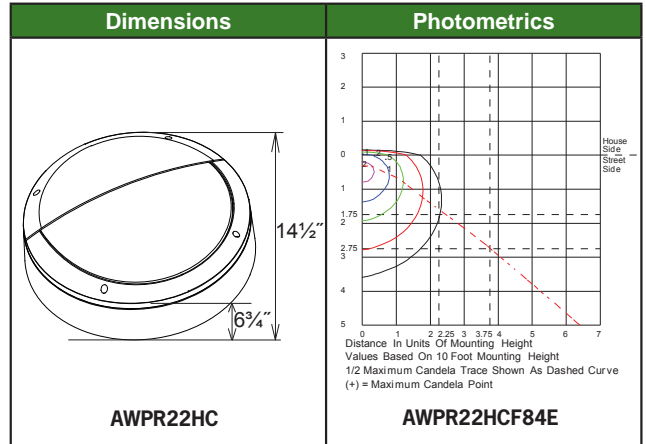

Options and Accessories	
Catalog #	Description
BBE	Battery Back Up - available for Compact Fluorescent models (specify 120V or 277V)
PC1	120V Photocell (Field Installed)
PC2	208-277V Photocell (Field Installed)



Specifications subject to change without notice.