

Project:



RLM RD14 STEM H: 11 1/4 W: 14 OAL: 25

Description


14" Deep Bowl pendant with 12" stem and 40° swivel canopy

Dimmable

Specifications

Housing	Spun aluminum with extruded stem and stamped steel canopy			
 Diffuser/Optics Bare lamp (no diffuser) for Dry locations only Clear tempered glass cylinder Frosted Glass cylinder 				
Light Source	GUL	MBL	Medium Base	
Max Watts	15	18	150	
Electrical	 MB - Accepts Medium base 120V incandescent, CFL or LED lamps (by others) rated for use in fully enclosed fixtures. MBL - Includes Medium base 120V HPF Triac dimmable OmniLED A lamp rated for use in fully enclosed fixtures. GUL - Includes GU24 base 120V HPF Triac dimmable 25,000 Hr OmniLED A lamp with integrated driver. 			
Mounting	Mounts over 4" recessed outlet box.			
Certification	Manufactured in accordance with U.L. standard 1598 - Suitable for wet locations (with diffuser only)			

Ordering Guide: Choose from each category, using designated code to specify.

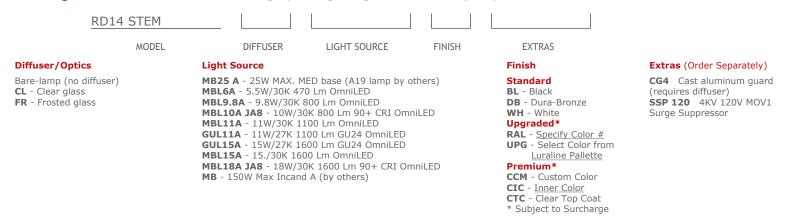

Specifications subject to change without notice. 800-940-6588 Sales@luraline.com www.luraline.com

AMERICAN

Lighting Your Way